

Survey for Dan'l J. Rohrer, Exec., Pleasant

Township 1 Page 1

Lucrecia Martin  
to  
Dan'l J. Rohrer et al

Vol. 111 Page 132

Sec. 12 T. 1 R. 8

Date 1911

Surv. \_\_\_\_\_

Thence

Being pt. of the N. pt. of S. Frac. pt. of Frac.  
Sec. 12 T. 1 R. 8. Begin at a stake in the  
W. line of said Frac. Sec. 8 at the S.W. side  
of Main being the S.W. C of the said S. Frac.  
part of said Frac. Sec.

with the W. line of said Frac. Sec. 12  
S.  $1/2$  E (By Mag. Meridian) 25 89/ ch to  
center of B. & S. pipe.

with the center line of said pipe N. 69 E.  
16 84/ ch to a stake

N.  $12 \frac{1}{4}$  W. 21 06/ ch to a stake at the S.  
side of said river

westwardly with south side of said  
river with meanderings to begin

30 acres

INDEXED ON MAP  
310 7D-1

Survey for D. Rohrer

Pleasant

Township

Page  
2

Henry Sidle  
to

Vol. 62 Page 232

Sec. 12 T. 1 R. 8

Martin L. Rohrer

Date 1881

Surv.

Thence

Being Pt 4<sup>th</sup> sec. Sec. 12

Begin at S. W. c of 55 acres sold by John  
Bill to David Murray at a stone in the W.  
line of said sec.

— N. 7 chains 94 lbs. to stone in center  
of State road.

— With said road N.  $69\frac{3}{4}$  E 8 ch to stone.

— S 10 ch. 58 lbs to post Wit: 10" red  
oak N.  $83\frac{3}{4}$  E.  $23\frac{3}{4}$  lbs. & Hickory 10"  
in dia. 18° forty lbs. west to place  
of beginning containing  
6.97 acres

INDEXED ON MAP  
310 7D-2

Survey for Dan. Rohrer, Pleasant

Township

Page

3

Geo. C. Dangle et ux  
to

Vol. 103 Page 314

Sec. 12 T. 1 R. 8

Harry E. Laffer et ux

Date 1906

Surv.

Thence

Pt Sec. 12

Begin at stone in B. & D. Pike where  
the river road intersects said pike  
with said pike S. 69 W. 7 ch 67 lbs to  
stone at the N. E.  $\swarrow$  of Daniel Rohrer  
19 acres

— S 21° 15.95 ch to a stone on the N. line  
of M. L. Rohrer's land.

— with said line E. 17.49 ch to a post  
in the said river road

— with said road N. 29 W. 6.42 ch to a  
stone on the rt bank of Miami  
river with the meanderings to the  
S. part of a piece of land formerly  
owned by Wm. Harris

INDEXED ON MAP

310 4D-3

Thence with said line N. 43 $\frac{1}{2}$  W.  
9.64 ch to beginning

20 acres more or less.

also. Pt Sec. 12

Begin at a stake on the W. bank of the  
Miami river at a point where the  
B & O. pike crosses said river

- with said road by true meridian S. 60 W

5.75 ch

- S. 43 $\frac{1}{2}$  E. 6.00 ch to stone

- N. 58 $\frac{1}{2}$  E. 1.50 ch to W. bank of river

- with meanderings to begin

204 acres

INDEXED ON MAP

310 7D-4

Survey for David Rolner

Pleasant

Township

4

Saml E Miles et ux

Vol. 110 Page 70

Sec. 11 T. 1 R. 8

to  
Martha Jane Miles

Date 1910

Surv. \_\_\_\_\_

Thence

Undivided  $\frac{1}{5}$  of following:

PT N. E. qr. Sec. 11

Begin at a stone in a road N. E.  $\angle$  to said  
Sec. 11

- S 88 W. 25.13 ch to a stone N. W.  $\angle$

See Andra.

- S.  $\frac{1}{2}$  E. 40.09 ch crossing branch to  
a stone in N. line of Henry Young.

- N. 88  $\frac{1}{2}$  E. 11 ch. to a stake in S.  
side of B. & D. pipe

- with the south side of said pipe

N. 72 E. 41.58 ch to a stone N. E.

$\angle$  to C. Potentilla

- N.  $\frac{1}{2}$  W. with east line of said

INDEXED ON MAP

310 70.5

section 36.80 ch crossing the Miami  
to beginning 92.20 acres

INDEXED ON MAP  
310 7D-6

Survey for David J. Rohrer, Pleasant Township Page 5

M. L. Rohrer  
to

Vol. 92 Page 407

Sec. \_\_\_\_\_ T. \_\_\_\_\_ R. \_\_\_\_\_

Mary Jane Bareglman

Date 1899

Surv. \_\_\_\_\_

Thence

Pt Sec. 11

Begin at stone at S. E. v Sec. 11

— with S. line said Sec. 11 N.  $89^{\frac{3}{4}}$  W.  
41 rds to stone

— N.  $\frac{1}{4}$  W.  $165^{\frac{8}{10}}$  rds to stone in S. side of  
B. & S. pipe

— with the south side of pipe N.  $73^{\frac{1}{4}}$  E  
42.92 rds to stone in East line of  
said Sec.


— with said section line S.  $\frac{1}{4}$  E  $178.28$   
rds to begin

44<sup>17</sup> acres

INDEXED ON MAP  
310 7D-7

2

Sec 1

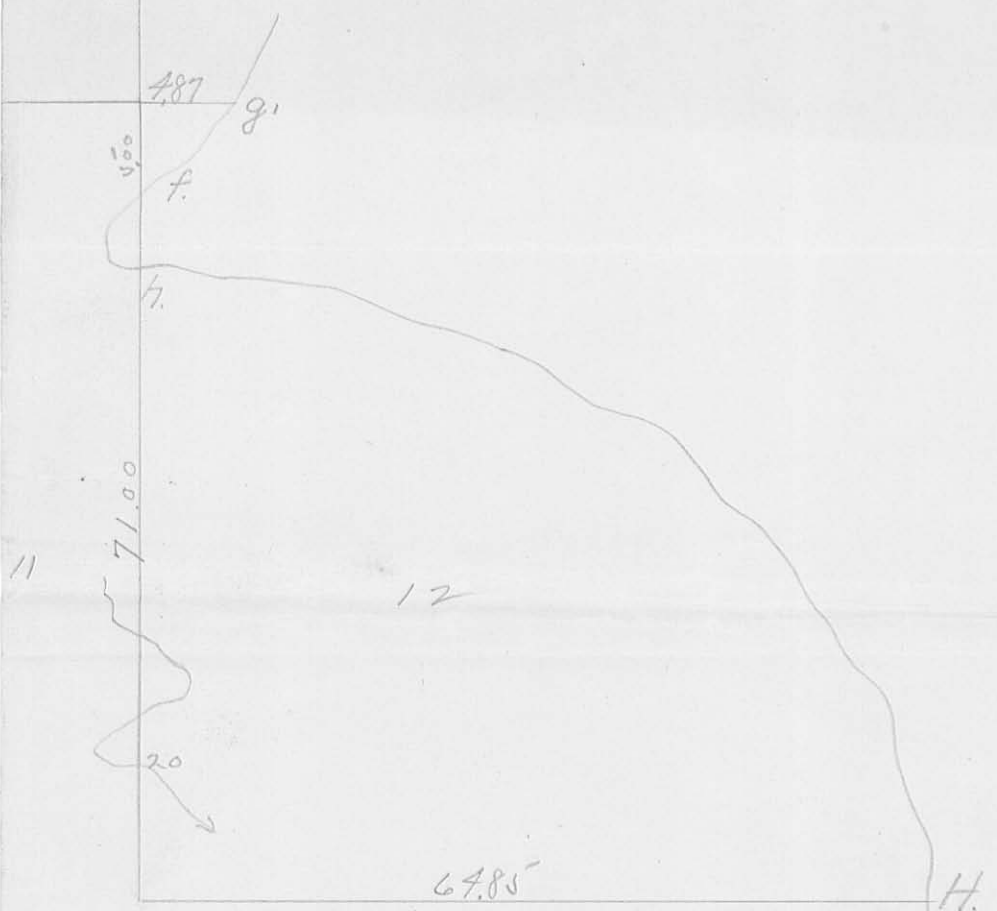

Sec. 13

H = Thorn 5" corner tree  
 g = willow 10" N. 62 E. dist 19  
 f = Elm 20" N. 51 E. " 36  
 h = { Beech 12" S. 12 W. " 26  
       { Hickory 8" N. 76 W. " 29

INDEXED ON MAP  
 310 EP



stone

Hannah Moore  
139.18

Stone  
2 brick bats

Sarah J Vankirk  
120.00

19.12

stone  
2 bats

61.00

John Moore  
76.90

stone  
9 lks  
from water  
wit:  
48" Elm  
S.E. 16 lks

INDEXED ON MAP  
310 9P

## ROHRER SURVEY

1915

Daniel Rohrer Flag.

Sherman Rohrer ch. cr.

Elmer Stahler ch. cr.

John Stahler axe

Searching records 5 hrs

Survey 1 day

Livery 2.00

310

ROHRER SURVEY

LINE A  
W. LINE FRAC. SEC. 12

Found a stone at S.W. L Sec 12  
Wit: 22" W. Oak stump N34W 4 lks  
Random line N 1/2 E N 1/2 E.

37.20 ch. to L stone S.W. L  
Sidell 6.97A and S.W. L 100 Acres

Random line came out 27 lks E of  
L stone S.W. L 6.97A O.K. CSE N 5'E  
45.03 ch to center gravel of Sidney  
Pike.

0.

3/4, 1915.

21

LINE B

With center of pike

8.00 ch.

N. 69 3/4 E.

N. 69 3/4 E.

LINE C

WITH W. LINE DANL ROHRERS

19 ACRES

S. 1/4 W. With fence S 1/4 W.

10.62 to post S.W. corner 19 A.

310

LINE D

S. LINE 6.97 ACRES

N.  $89\frac{3}{4}$  WN.  $89\frac{3}{4}$  W

7.56 ch From post to L stone

LINE E

WITH S. LINE Danl Roberts 19 A.

17.36 ch to post S.E. L 19 A.

and S.W. Cor. H. E. Loffer

Offset 10' S. of stone at S.W.  
 L 6.97 Acres and 10' S. of post at  
 Loffers S.W. cor.

Marked into line between these points  
 and found S.W. Cor. of D. Roberts  
 19 A. in this line

Produced this line east.

S.  $89\frac{3}{4}$  ES.  $89\frac{3}{4}$  E

38.91 ch. Set stake for corner

No stone or wit: trees left.  
 as called for by H. C. Moores  
 Survey Record.

Channel changed and deposited on  
 West side.

40.28 to waters edge.

O. K. Dist: = 38.91

310

LINE F  
WITH water edge of river  
5.17  
S. 27  $\frac{3}{4}$  E

LINE G  
S. 41 E  
6.15

LINE H  
S 14  $\frac{1}{4}$  E      S 14  $\frac{1}{4}$  E  
8.82 ch

LINE I  
4.52  
S. 28  $\frac{1}{2}$  E      S 28  $\frac{1}{2}$  E

LINE J  
4.83  
S. 18  $\frac{1}{2}$  E      S. 18  $\frac{1}{2}$  E

LINE L  
S. 28  $\frac{1}{4}$  E.      S. 28  $\frac{1}{4}$  E  
4.57

LINE M  
S. 36  $\frac{1}{2}$  E.      S. 36  $\frac{1}{2}$  E  
2.63

LINE N.  
S. 30 E.      S. 30 E  
5.42

Thorn tree gone

Located S. Line farm by  
fence posts.

D. Rohrer says fence was built  
by Mat. Wolf on South assisted by  
Martin Rohrer.  
Drove stake on S. Line 13 lxs  
W. of waters edge.  
Wit: to stake  
old 30" Burr Oak Stump  
N 51 W 14 lxs

310

LINE 0  
Random Line

Offset 7' N. of stake at river  
commenced chaining from water edge  
Random N.  $89\frac{1}{2}^{\circ}$  W N.  $89\frac{1}{2}^{\circ}$  W  
N.  $89\frac{1}{2}^{\circ}$  W N.  $89\frac{1}{2}^{\circ}$  W

Set stake at 50.00

offset 3" S.

O.K. Dist 65.15

Random came out 22 feet  
N. of stake at S.W. Sec. 12

O.K. Cse. N.  $89^{\circ}45'$  W.  
Total Northing = 15 feet  
Correction at 50 =  $11.5' + 7' = 18.5'$   
Move stake south 18.5'

Total Acreage = 214.67

214.66

150.00

64.66 to be cut off west  
side.

$64.66 - 696 = 57.70$

$57.70 = 577$  ch

37.20) 577.00 115.510 ch. from  
3720  
20500 West line  
18600 and parallel with  
19000 West line.  
18600  
4000  
3720  
2800

see next page

310

Ran Dividing Line cutting  
off 150 acres on E. side.  
Chained 15.51 ch E. from Stone  
S. W. - Sec. 12

Chained 15.51 ch E. from  
stone in W. Line Sec. 12 and  
37.20 ch N. of S.W. L of Sec. 12

Ran dividing line between  
these points.

At South end set stone <sup>boulder</sup> for  
corner about 12" N. of wire fence.

At N. end set boulder 4" x 12"  
x 24" pointed, with pieces  
broken tile in fence line.

O.K. csc N 5' E

O.K. Dist: = 37.20 ch

310