
Flum Surrey Washington Tap, Sec. 24 T. 7 S. R. 8 E.	High cloud of the state of the
TK South Line 200 1 1 1 1 20 20 20 20 20 20 20 20 20 20 20 20 20	N. 32 22'm 33-02 Stone of Ston
Room State S	S 89 - OOE SON MAP  S 800 S 80

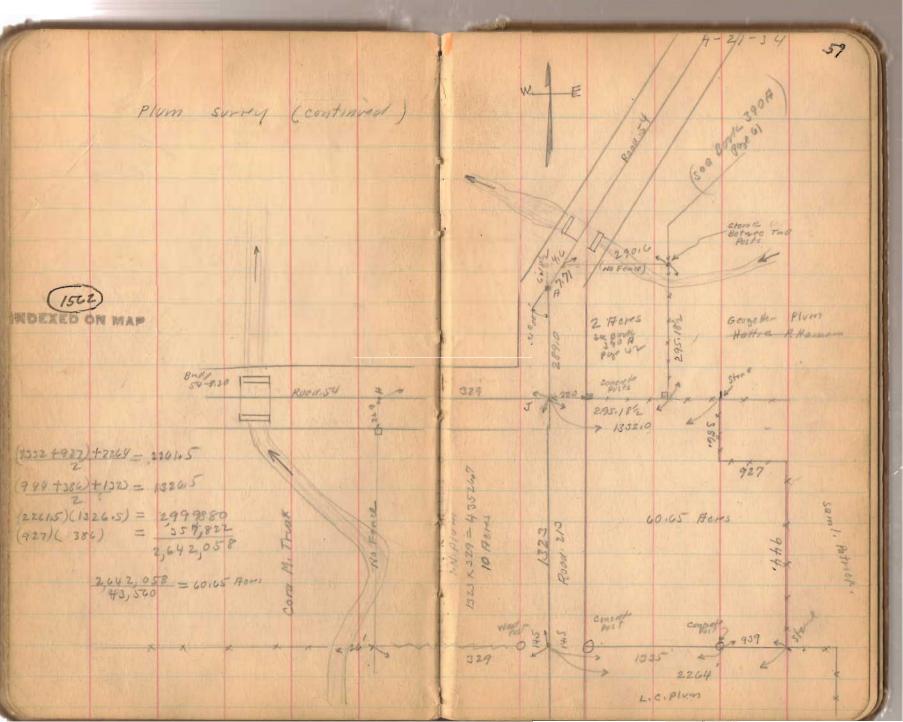

		72 230	2807	15461		00 23,1 52
Plum surrey (continued)		3		4	2000	7
		Mr + Mr +		0 0 0	THE RESERVE AND ADDRESS OF THE PARTY OF THE	1,656879
	1	D.M.D.	389.8	1302.3	the same of the sa	The state of the s
		WI	0	5	207.7	Name and Address of the Owner, where the Owner, which is the Owner, where the Owner, which is the Owner,
		Dept Came	1,5.8	966.7		9.8401
		(come) 5- (59,2 6391	7.7	13,4		1090.7
		N + Co		7.88.7	The second second	
		Bearing 310-02E	\$890-30 E	3 3	N32-2	
	4	t. Sine	0000	6866		
INDEXED ON MAP		9847 C489.	421 9540		6 9	No. Company

The following described land in Section 24, Town 7 South, Range 8 East and being in Washington Township, Logan County Ohio.

Beginning at S.E. corner of N.W. Quarter of said Section 24.

Beginning at S.E. corner of N.W. Quarter of Section 24; thence with center of Road No. 34 (known as Huntsville and Lewistown Pike)

N.1° O' E. 289.0 feet to a stake; thence N.37° 38' E. 74.0 feet to a stake at the center of a stone arch culvert; thence with the center of a small branch downstream the following courses and distances.

N. 57° 47' W. 82.7 feet

N. 39° 22' W. 100.8 feet

N. 22° 10' W. 101.6 feet

N. 42° 34' W. 101.6 feet

N. 36° 56' W. 100.3 feet

N. 36° 19' W. 112.7 feet

N. 68° 22' W. 100.3 feet

N. 59° 14' W. 100.3 feet

N. 68° 22' W. 100.3 feet

N. 76° 12' W. 102.4 feet

N. 70° 48' W. 100.7 feet

N. 58° 05' W. 100.5 feet

N. 63° 48' W. 196.0 feet

to a point at the junction of another branch and being a point in J.J. Brunson's East line; thence with the center of said branch,

(1562) ID-1

upstream, S. 10° 02' E. 692.6 feet to one of said Brunson's corners; thence S.87° 30' E. 175.0 feet to a post at another of Brunson's corners; thence S.1° 12' W. 431.0 feet to the South line of said Quarter-section and being in Road No.54; thence S.89° C'E. with said Quarter-section line 767.0 feet to place of beginning, said tract containing 16.62 acres more or less and being the same tract as shown in Logan County Surveyor's Book No.570, Page 58.

Tract No.2 Being in S.W. Quarter of Section 24 and being 10.0 acres off of East side of N. half of said Quarter-section.

Said ten acres being bounded on the North by Road No.54, on the East by Road No. 215, on the South by land of Carrie Van Gordan, and on the West by 50 acre tract of Cora M. Truax; also being the same land as shown in Logan County Surveyor's Book No.570, Page 59.

Beginning at N.W. corner of said S.E. Quarter; thence with center of Road No. 213 South 1223.0 feet to N.W. corner of Lytle C.Plum's 80 acre tract; thence with the North side of said 80 acres East 2264.0 feet to stone, corner of S.Patrick's 20 acre tract; thence with one of the West sides of said 20 acre tract North 944.0 feet to a point, at one of Patrick's corners; thence West 927.0 feet to a point at one of Patrick's corners; thence North 386.0 feet to a stone at N.W. corner of said tract and said stone being in Georgetta Plum's South line; thence West 1332.0 feet to place of beginning,

said tract containing 60.65 acres more or less as shown in Logan County Surveyor's Book 570, Page 59.

Beginning at S.W. corner of N.E. Quarter; thence East 295.18 feet to a large concrete post of Georgetta Plum's S.W. corner; thence North with said Plum's West line 295.18 feet to a stone; thence West and parallel to first described line to the center of Road No. 54(known as Huntsville and Lewistown pike) thence South with center of said Road No. 54 to the place of beginning, said tract containing 2.00 acres as shown in Logar County Surveyor's Book No. 570, Page 59.



